





More Precision.

induSENSOR

Linear inductive displacement sensors



EDS series: long-stroke sensors for hydraulics & pneumatics

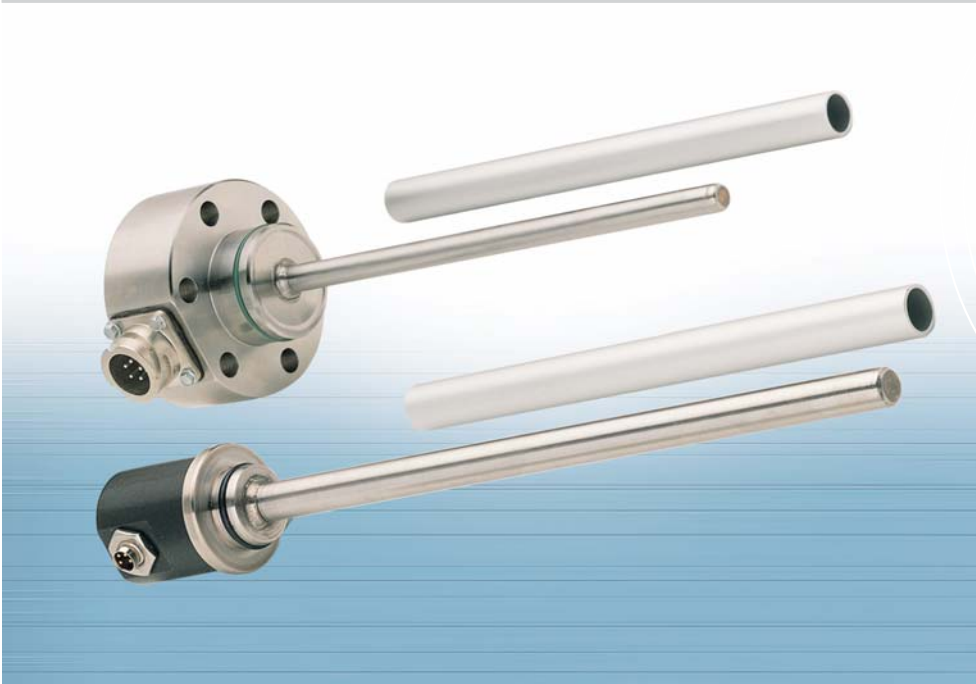

Measurement ranges 100 ... 630 mm
Output signal 4 ... 20 mA
Integrated microelectronics
High pressure resistance
Oil resistant and maintenance-free
Short offset ranges

The sensor elements of the EDS series are protected by a pressure resistant stainless steel housing. The sensor electronics and signal conditioning are completely integrated in a sensor flange.

As a target an aluminum sleeve is used which is integrated into the piston rod and is passed without making contact and wear-free over the sensor rod.

Due to the use of the eddy current principle, no permanent magnets need to be mounted inside the cylinder.

Due to the rugged design of the long-stroke sensors of the EDS series, these sensor systems have proven themselves, not only through the integration in hydraulic and pneumatic cylinders, but also especially under harsh industrial conditions.


Typical applications

Long-stroke sensors in the EDS series are designed for industrial use in hydraulic and pneumatic cylinders for the displacement and position measurement of pistons or valves, e.g. for the measurement of

- displacement, distance, position, gap
- deflection
- movement, stroke
- filling level, immersion depth, spring travel

Artikelbezeichnung

EDS - 300 - S - SA7 - I

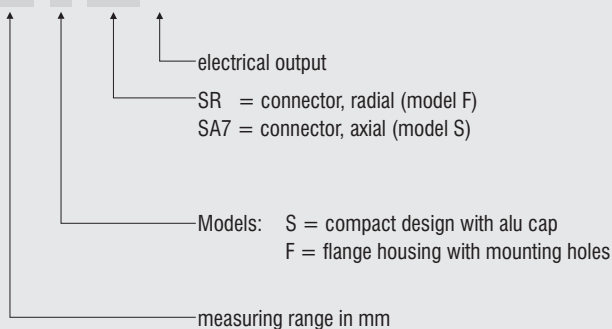


Integration in a hydraulic cylinder


Model		EDS-100	EDS-160	EDS-200	EDS-250	EDS-300	EDS-400	EDS-630	
Connection		S, F	S, F	S	S, F	S, F	S, F	S, F	
Measuring range	mm	100	160	200	250	300	400	630	
Linearity	$\pm 0.3\%$ FSO	mm	0.3	0.48	0.6	0.75	0.9	1.2	1.89
Resolution	0.05 % FSO	mm	0.05	0.08	0.1	0.125	0.15	0.2	0.315
Temperature range		-40 °C ... +85 °C							
Temperature stability		± 200 ppm / °C							
Frequency response (-3 dB)		150 Hz							
Output		4 - 20 mA							
Output load		500 Ohm							
Power supply		18 - 30 VDC							
Current consumption		max. 40 mA							
Connector	model S model F	7-pin connector (sensor cable as an option) options radial or axial output 5-pin radial bayonet-connector with mating plug							
Pressure resistance		450 bar (sensor rod, flange)							
Protection class		IP 67							
Electromagnetic compatibility (EMC)		EN 50 081-2 spurious emission EN 50 082-2 interference immunity							
Shock ¹	IEC 68-2-29 IEC 68-2-27	40 g, 3000 shocks / axis 100 g radial, 300 g axial							
Vibration	IEC 68-2-6	5 Hz ... 44 Hz ± 2.5 mm 44 Hz ... 500 Hz ± 23 g							
Material		V4A-Steel 1.4571							

FSO = Full Scale Output 1) Half sinusoid 6 ms

Model S

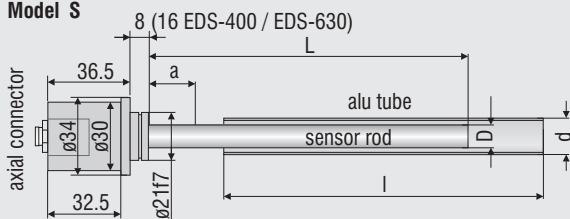

Model F

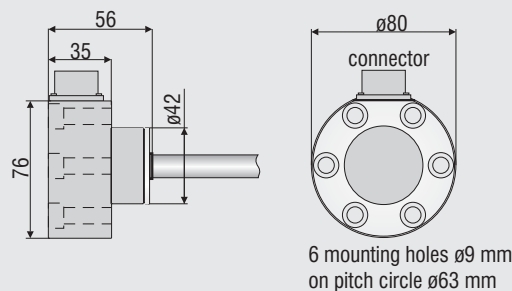


6 mounting holes $\varnothing 9$ mm
on pitch circle $\varnothing 63$ mm

OEM sensors

Modified OEM sensors with e.g. different measuring ranges, sensor rods and tubes are available on request.
Example: Model Z with axial PVC wire

Model Z



meas. range	sensor rod		alu tube		offset a
	L	D	l	d	
100	140	10	140	16	20
160	200	10	200	16	20
200	240	10	240	16	20
250	290	10	290	16	20
300	340	10	340	16	20
400	450	12	450 (S) 460 (F)	18 (S) 26 (F)	25
630	680	12	680 (S) 690 (F)	18 (S) 26 (F)	25

More Precision.

www.micro-epsilon.com

Sensors and systems

for displacement, position and dimension

Sensors and measurement devices

for non-contact temperature measurement

Measurement systems

for online/offline quality control

MICRO-EPSILON Headquarters

Koenigbacher Str. 15 · 94496 Ortenburg / Germany

Tel. +49 (0) 8542 / 168-0 · Fax +49 (0) 8542 / 168-90

info@micro-epsilon.com

MICRO-EPSILON UK Ltd.

Dorset House, West Derby Road · Liverpool, L6 4BR

Phone +44 (0) 151 260 9800 · Fax +44 (0) 151 261 2480

info@micro-epsilon.co.uk

MICRO-EPSILON USA

8120 Brownleigh Dr. · Raleigh, NC 27617 / USA

Phone +1/919/787-9707 · Fax +1/919/787-9706

info@micro-epsilon.us



MICRO-EPSILON