










# More Precision.

## **scanCONTROL**

2D/3D laser scanner (laser profile sensors)

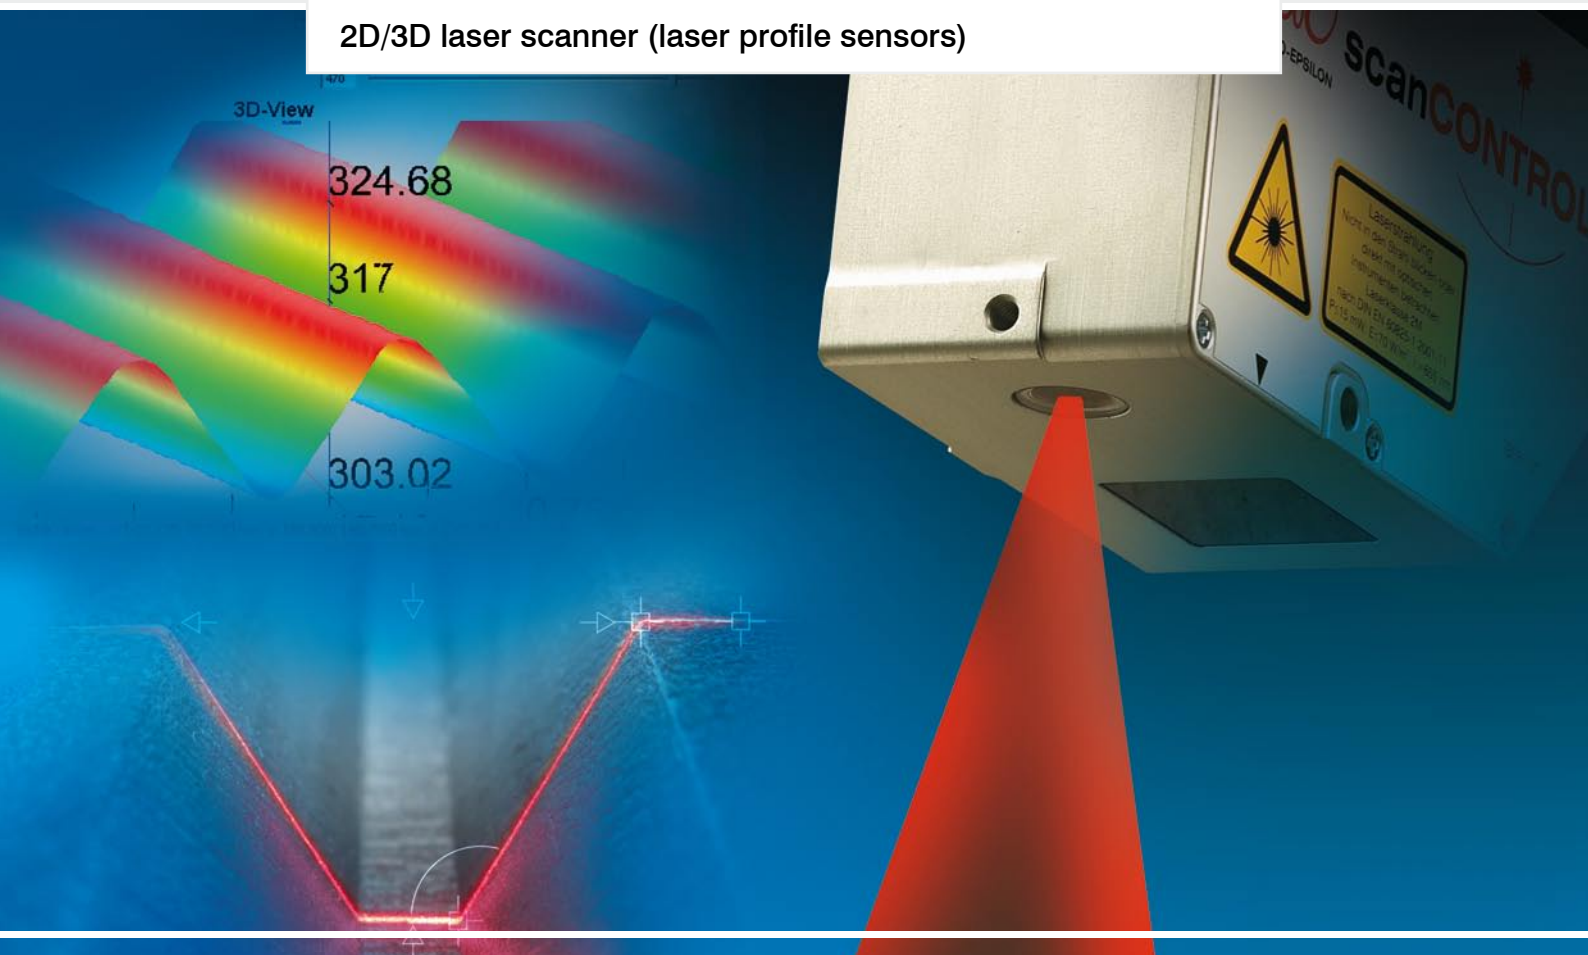

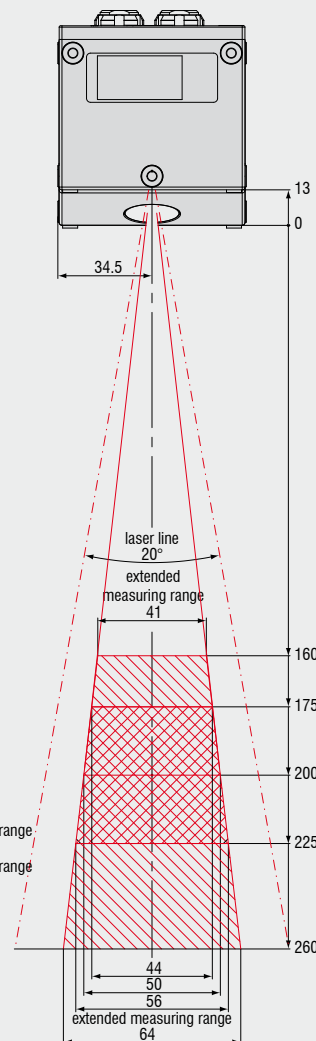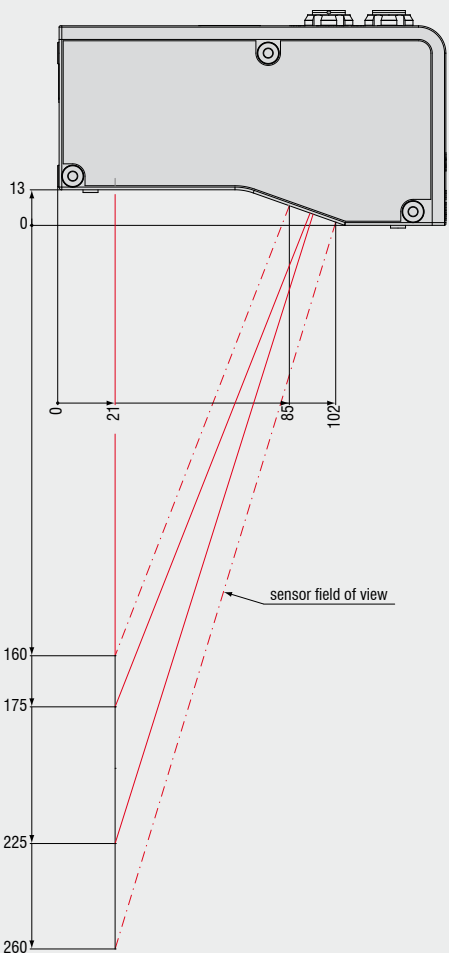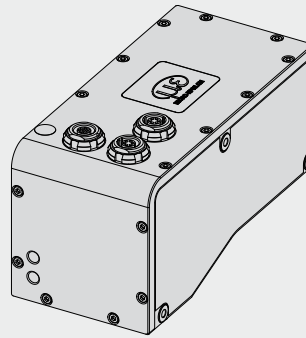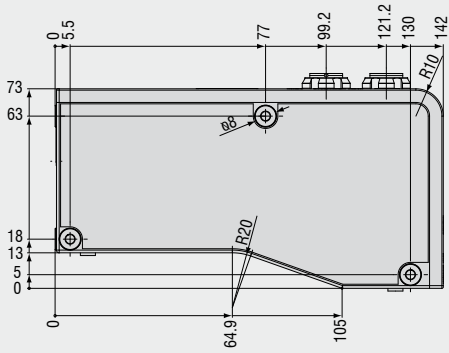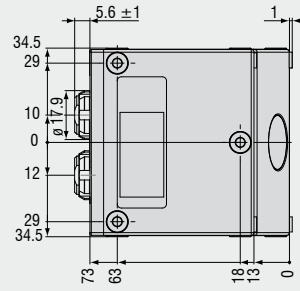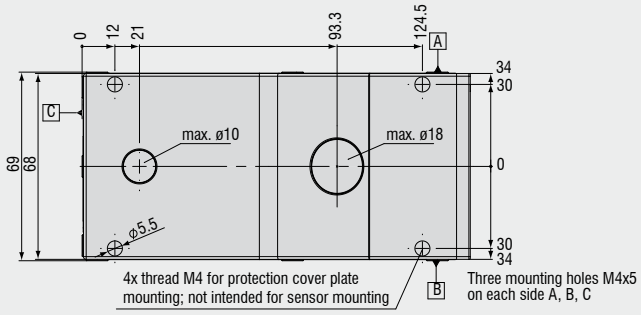

Model		scanCONTROL	COMPACT 2700-50	HIGHSPEED 2750-50	SMART 2710-50
z-axis (height)	Standard measuring range 50mm	Start of measuring range		175mm	
		Midrange		200mm	
		End of measuring range		225mm	
	Extended measuring range 100mm	Start of measuring range		160mm	
		End of measuring range		260mm	
	Linearity <sup>1)</sup>	±0.2% FSO (3sigma)		±100µm	
	Resolution	0.04% FSO		20µm	
Reference resolution <sup>2)3)</sup>			10µm		
x-axis (width)	Standard measuring range	Start of measuring range		44mm	
		Midrange		50mm	
		End of measuring range		56mm	
	Extended measuring range	Start of measuring range		41mm	
		End of measuring range		64mm	
	Point distance	Midrange		80µm	
Resolution x-axis		640 points/profile			
Profile frequency		100Hz	2,000Hz	100Hz	
Measurement rate		64,000 points/sec	1,28 mio points/sec	-	
<b>Interfaces profile data</b>	FireWire	■	■	■	
	Ethernet	■	■	■	
	RS422 <sup>4)</sup>	■	■	■	
	Trigger <sup>4)</sup>	■	■	■	
	Counter (encoder) <sup>4)</sup>	■	■		
<b>Signal output SMART</b>	RS422 <sup>4)</sup>			■	
	Analogue <sup>5)</sup>			■	
	Switching signal <sup>5)</sup>			■	
Display (LED)		1x laser, 1x power/error/status			
Protection class		IP 64			
Operating temperature		0°C up to 50°C			
Storage temperature		-20°C up to 70°C			
Cable length		up to 20m			
	Ethernet with Switch FireWire with HUB	up to 50m			
Weight		appr. 800g			
Galvanic isolation		Only at RS422, no isolation of 24V-supply, internal circuit and FireWire bus. If isolation necessary, external 24V-DC-DC-converter required			
Vibration		2g / 20 ... 500Hz			
Shock		15g / 6ms			
Supply		8-30 VDC, 500mA			
Light source		semiconductor laser 658nm			
Aperture angle laser line		20°			
Laser power	standard	10mW (class 2M)			
	optional	20mW (class 3B)			
Laser off		via software (standard) / via external contact (optional)			
Permissible ambient light (fluorescent light) <sup>2)</sup>		10,000lx			

<sup>1)</sup> Standard measuring range

<sup>2)</sup> Measuring object: Micro-Epsilon standard object (metallic, diffusely reflecting material)

<sup>3)</sup> According to a one-time averaging across the measuring field (640 points)

<sup>4)</sup> Programmable as serial interface or synchronisation input or encoder input

<sup>5)</sup> Only with Output Unit

FSO = Full scale output

## High performance sensors made by Micro-Epsilon



### Sensors and systems for displacement, position and dimension

- Eddy current sensors
- Optical and laser sensors
- Capacitive sensors
- Inductive sensors
- Draw-wire sensors
- Optical micrometers
- 2D/3D profile sensors
- Image processing



### Sensors and measurement devices for non-contact temperature sensors

- Thermal imager
- Online instruments
- Handheld devices



### Measuring systems for quality control

- Plastic and film
- Tyre and rubber
- Web material
- Automotive components
- Glass and panes