



# More Precision

**thermoMETER** // Non-contact IR temperature sensors





### thermoMETER CTLaserCOMBUSTION

Non-contact IR temperature sensor with laser sighting for measurements through flames and of flame gases in combustion processes from 200°C to 1450°C (optional up to 1650°C)

- Measuring range 200°C up to 1450°C
- Double laser marks exact spot size from 1.6mm
- Usable in all modern applications where "size of spot matters"
- Optical system 45:1 with selectable focus
- Up to 85°C ambient temperature without cooling
- Automatic laser switch-off at 50°C
- Cooling and protection accessories for harsh environmental conditions

#### Optical specifications thermoMETER CTLaserCOMBUSTION

□ = smallest spot size (mm)

##### Standard Focus

SF45 lens	45:1	20	20.8	21.7	22.5	23.4	24.2	25	25.9	27	32.5	38.4	50	61.7	73.4		
distance (mm)		0	150	300	450	600	750	900	1050	1200	1350	1500	1800	2100	2400		

##### Close Focus

CF1 lens	45:1	20	9.5	7	1.6	11	26.3	41.7	57	72.6	88.2	104	119.6	135	165	196	227
CF2 lens	45:1	20	16	14.5	12	9	3.4	11.2	19	27	35	42.5	50.3	58	73.6	89.2	105
CF3 lens	45:1	20	17	16.2	14.5	12.3	8.4	4.5	10.7	16.8	23	29	35	41.3	53.5	65.8	78
CF4 lens	45:1	20	19.2	19	18.6	18	17	15.6	14.5	13.4	12.3	11.1	10	13.4	20	26.7	33.4
distance (mm)		0	40	50	70	100	150	200	250	300	350	400	450	500	600	700	800


Model	CTLC-4SF45-C3	CTLC-2SF45-C3	CTLC-6SF45-C3
Optical resolution	45:1	45:1	45:1
Temperature range <sup>1</sup>	200°C to 1450°C (optional 400°C to 1650°C)		
Spectral range	3.9µm	4.24µm	4.64µm
Fields of application	through flames to monitor workpieces inside ovens, to measure inside chemical reactors, to observe the brick temperature in combustion chambers	CO <sub>2</sub> flame gases in combustion processes, garbage burning or processes inside chemical reactors	CO flame gases in combustion processes, garbage burning or processes inside chemical reactors
System accuracy <sup>3,4</sup>	±1%		
Repeatability <sup>3</sup>	±0.5% or ±0.5°C		
Temperature resolution (digital)	0.1°C		
Response time (90% signal) <sup>2</sup>	10ms		
Emissivity/gain <sup>1</sup>	0.100 to 1.100		
Transmissivity/gain <sup>1</sup>	0.100 to 1.000		
Signal processing <sup>1</sup>	peak hold, valley hold, average; extended hold function with threshold and hysteresis		
Outputs/analogue	channel 1 channel 2	0/4 to 20mA, 0 to 5/10V ; thermocouple J, K sensor temperature (-20 to 180 °C as 0 to 5/10V), alarm output	
Alarm output	open - collector (24V/ 50mA)		
Optional	relay: 2 x 60V DC/42VAC <sub>eff</sub> ; 0.4A; electrically isolated		
Outputs/digital	optional	USB, RS232, RS485, CAN, Profibus DP, Ethernet	
Output impedances	current output voltage output	mA max. 500Ω (with 8 to 36VDC) mV min. 100kΩ load impedance ; thermocouple 20Ω	
Inputs	programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions)		
Cable length	3m (standard), 8m, 15m		
Power supply	8 to 36VDC; max. 160mA		
Laser	class II (635nm), 1mW, ON/OFF via controller or software		
Protection class	IP65 (NEMA-4)		
Ambient temperature	sensor: -20°C to 85°C (50°C if Laser ON) ; controller: 0°C to 85°C		
Storage temperature	-40°C to 85°C		
Relative humidity	10 to 95%, non condensing		
Vibration	IEC 68-2-6: 3 G, 11 to 200Hz, any axis		
Shock	IEC 68-2-27: 50 G, 11ms, any axis		
Weight	sensor: 600g ; controller: 420g		

<sup>1</sup> adjustable via programming keys or software

<sup>2</sup> with dynamic adaption at low signal levels

<sup>3</sup> at ambient temperature 23 ±5°C; whichever is greater; with object temperature ≥ 0°C

<sup>4</sup> ε = 1, response time 1s



#### Product identification

CTLC -	4	SF45-	C3
Cable length [3m (standard) / 8m / 15m]			
Focus [SF45 / CF1 / CF2 / CF3 / CF4]			
Spectral range [3.9µm / 4.24µm / 4.64µm]			
thermoMETER CTLaserCOMBUSTION			

#### Accessories page 20 - 21


- Mounting bracket
- Air purge collar
- Rail mount adapter for controller
- Water cooled housing
- Interface kit
- Certificate of calibration




**LASER LIGHT**  
DO NOT STARE INTO BEAM  
CLASS 2 LASER  
IEC 60825-1:2007  
1mW / 630-650nm

CTLaser / CTLaserFAST / CTLaserGLASS / CTLaserM1/M2/M3/M5 / CTLaserCOMBUSTION

Controller

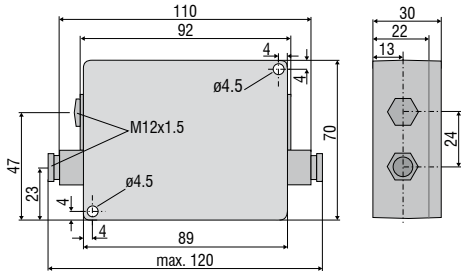


Sensor




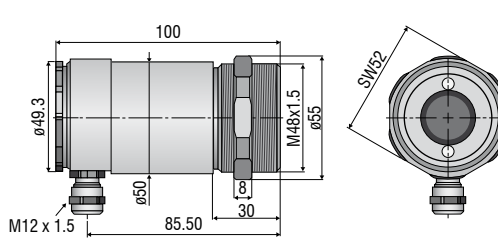


CTratioM1

Controller




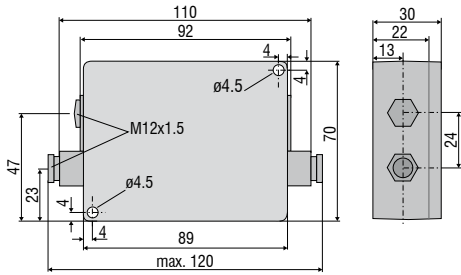


Sensor

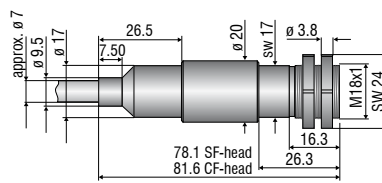

TM-FB-CTL Mounting bracket (fixed);  
included in CTL scope of supply

TM-AB-CTL Mounting bracket (adjustable)



TM-W-CTL Water cooled housing and  
air purge collar TM-AP-CTL,  
mounted on adjustable mounting bracket TM-AB-CTL

TM-W-CTL Water cooled housing

TM-AP-CTL Air purge collar

Mechanical accessories		
Art. No.	Model	
2970238	TM-AB-CTL	Mounting bracket, adjustable, stainless steel
2970239	TM-AP-CTL	Air purge collar, stainless steel
2970240	TM-W-CTL	Water cooled housing, stainless steel, for ambient temperatures up to 175°C
2970241	TM-RAIL-CTL	Rail mount adapter for CTLaser controller
2970242	TM-COV-CTL	Closed cover for controller
2970243	TM-MN-CTL	Mounting nut, stainless steel (spare)
2970244	TM-FB-CTL	Mounting bracket, fixed, stainless steel (spare)
2970298	TM-A20UN-CTL	Screw adapter M48x1 on 20UN-2A screw including mounting nut

High temperature accessories for CTLaser		
2970366	TM-J-CTL	Cooling jacket (length 228mm, ø89mm) (conversion kit TM-CONK-CTL is required)
2970374	TM-CONK-CTL	Conversion kit for CTL on axial cable exit, for integration in cooling jacket
2970368	TM-JAB-CTL	Adjustable mounting bracket for cooling jacket
2970369	TM-MF-CTL	Mounting flange M48x1.5 for TM-PF-CTL
2970370	TM-AST300-CTL	Reflection protection tube M48x1.5, 300mm length
2970371	TM-PA-CTL	Pipe adapter M48x1.5
2970372	TM-RM-CTL	Furnace wall mount accessory for CTL (TM-MF-CTL, TM-AST300-CTL and TM-PA-CTL)
2970412	TM-PF-CTL	Pipe flange M48x1.5 for directly mounting a CTL sensor
2970487	TM-CJA-CTL	Cooling Jacket Advanced - universal cooling jacket for CSLaser, CTLaser and CTVideo / CSVideo up to 315°C


Calibration		
2970253	TM-CERT-CTL	Certificate of calibration
2970324	TM-HTCERT-CTL	Certificate of calibration for CTLaser M1-/M2-/M3-/M5-/G-sensors

Interfaces		
2970245	TM-USBK-CTL	USB interface, computer cable, software CompactConnect second cable gland for controller
2970246	TM-RS232K-CTL	RS232 interface, computer cable, software CompactConnect second cable gland for controller
2970338	TM-RS485USBK-CTL	RS485-USB-adapter, incl. PC cable, Software CompactConnect and CTmulti, second cable gland for use with interface board TM-RS485B-CTL
2970248	TM-RS485B-CTL	RS485 interface board incl. second cable gland
2970249	TM-CANK-CTL	CAN-Bus interface; protocol: CANopen Presettings: module address20 (14H), 250kBaud, 0-60°C
2970250	TM-PFBDPK-CTL	Profibus-DPV1 interface for CT selectable with DIN M12 or SUB-D connection
2970251	TM-ETHNK-CTL	Ethernet-Kit: interface board, external Ethernet adapter, software CompactConnect, second cable gland
2970252	TM-RI-CTL	Relay interface: two electrically isolated relays, 60VDC/ 42VAC <sub>eff</sub> 0.4A

Sensor cables and high temperature cables for CTLaser		
2970374	TM-CONK-CTL	Connector-Kit for cables with connector
4800254.003	TM-CB3C-CTL	Sensor cable with connector (3m)
4800254.003H	TM-CB3HC-CTL	High-temperature sensor cable with adapter (3m)
4800254.008	TM-CB8C-CTL	Sensor cable with adapter (8m)
4800254.008H	TM-CB8HC-CTL	High-temperature sensor cable with adapter (8m)
4800254.015	TM-CB15C-CTL	Sensor cable with adapter (15m)
4800254.015H	TM-CB15HC-CTL	High-temperature sensor cable with adapter (15m)




TM-J-CTL cooling jacket (length 228mm, ø 89mm) with adjustable mounting bracket TM-JAB-CTL; suitable for ambient temperatures up to 180°C



TM-PF-CTL and TM-MF-CTL mounting flange M48x1,5 for directly mounting a CTL sensor



TM-RM-CTL Furnace wall mount accessory for CTLaser / CTratio: TM-MF-CTL, TM-PF-CTL, TM-AST300-CTL and TM-PA-CTL

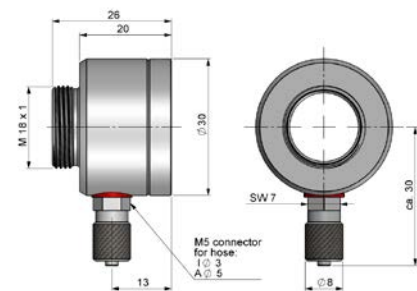

TM-AP-CTR Air purge collar

CTratio		
Art. No.	Model	
2970348	TM-FB-CTR	Mounting bracket, stainless steel, adjustable in one axis
2970395	TM-AP-CTR	Air purge collar, stainless steel
2970373	TM-RM-CTR	Furnace wall mount, stainless steel
2970351	TM-CERT-CTR	Certificate of calibration

## Further IR temperature measurement devices from Micro-Epsilon



**thermoIMAGER TIM**  
Compact USB thermal imaging cameras  
for precise thermography



**thermoMETER CTVideo/CSVideo**  
IR temperature sensors with  
crosshair laser sighting and video output



**thermoMETER Handheld**  
Innovative handheld pyrometer with laser  
sighting for inspection and maintenance

