



# More Precision

**thermoMETER** // Non-contact IR temperature sensors





### thermoMETER CTLaserM1/M2

Non-contact IR temperature sensor with laser sighting for metal processing

- Measuring range 250°C up to 2200°C
- 1µm/1.6µm measuring wavelength for accurate temperature measurements in difficult emissivity conditions
- Response time of 1ms
- Double laser marks exact spot size from 0.45mm
- For metal processing and measurements of metal oxides and ceramics
- Optical resolution 300:1 and 150:1 with selectable focus
- Up to 85°C ambient temperature without cooling, automatic laser switch-off at 50°C, up to 315°C with water cooled housing
- Selectable and scalable analogue output, optional digital interfaces

#### Optical specifications thermoMETER CTLaserM1/M2

□ = smallest spot size (mm)

##### Standard Focus

1L/2L SF	150:1	20	18.3	16.5	14.8	13	11.4	9.6	8.5	7.3	9.8	13.5	17.3	23.5	30
1H/2H/H1 SF	300:1	12	10.9	9.8	8.6	7.5	6.3	5.2	4.5	3.7	5.1	7.3	9.4	13	16.6
distance (mm)		0	150	300	450	600	750	900	1000	1100	1200	1350	1500	1750	2000

##### Close Focus

1L/2L CF2	150:1	20	13.7	7.3	1	8	15	22	36	50	64	78	92		
1H/2H/H1 CF2	300:1	12	8.2	4.4	0.5	4.6	8.9	13	21.4	30	38	46.4	54.8		
1L/2L CF3	150:1	20	15.4	10.7	6	1.3	6.7	12	22.6	33.3	44	55	65		
1H/2H/H1 CF3	300:1	12	9.2	6.4	3.6	0.7	3.9	7.1	13.4	19.8	26.1	32.5	38.8		
distance (mm)		0	50	100	150	200	250	300	400	500	600	700	800		

##### Close Focus

1L/2L CF4	150:1	20	18.1	16.3	14.4	12.5	10.6	8.7	6.8	4.9	3	5.6	10.7	15.8	21
1H/2H/H1 CF4	300:1	12	10.9	9.7	8.5	7.4	6.2	5	3.9	2.7	1.5	3	6	9	12
distance (mm)		0	50	100	150	200	250	300	350	400	450	500	600	700	800

##### Far Focus


1L/2L FF	150:1	20	20.5	21	21.5	22	22.5	23	23.4	24	29	41	53.4	62.5	
1H/2H/H1 FF	300:1	12	12	12	12	12	12	12	12	12	14.7	21.3	28	33	
distance (mm)		0	450	900	1350	1800	2250	2700	3000	3600	4000	5000	6000	6750	

Model	CTLM-1LSF150-C3	CTLM-1HSF300-C3	CTLM-1H1SF300-C3	CTLM-2LSF150-C3	CTLM-2HSF300-C3	CTLM-2H1SF300-C3
Optical resolution	150:1	300:1		150:1	300:1	
Temperature range <sup>1</sup>	485 to 1050°C	650 to 1800°C	800 to 2200°C	250 to 800°C	385 to 1600°C	490 to 2000°C
Spectral range	1µm			1.6µm		
System accuracy <sup>2</sup>	±(0.3% of reading + 2°C)					
Repeatability <sup>2</sup>	±(0.1% of reading + 1°C)					
Temperature resolution	0.1°C	0.2°C		0.1°C	0.2°C	
Response time (90% signal) <sup>3</sup>	1ms					
Emissivity/gain <sup>1</sup>	0.100 to 1.100					
Transmissivity/gain <sup>1</sup>	0.100 to 1.000					
Signal processing <sup>1</sup>	peak hold, valley hold, average; extended hold function with threshold and hysteresis					
Certificate of calibration	optional					
Outputs/analogue	channel 1	0/4 to 20mA, 0 to 5/10V, thermocouple J, K				
Outputs/analogue	optional	relay: 2 x 60VDC / 42VAC; 0.4A; electrically isolated				
Alarm output		open - collector (24V/ 50mA)				
Outputs/digital	optional	USB, RS232, RS485, CAN, Profibus DP, Ethernet				
Output impedances	current output	mA max. 500Ω (with 5 - 36VDC)				
	voltage output	mV min. 100kΩ load impedance; thermocouple 20Ω				
Inputs		programmable functional inputs for external emissivity adjustment, ambient temperature compensation, trigger (reset of hold functions)				
Cable length		3m (standard), 8m, 15m				
Power supply		8 to 36VDC; max. 160mA				
Laser		class II (635nm), 1mW, ON/OFF via controller or software				
Protection class		IP65 (NEMA-4)				
Ambient temperature		sensor: -20°C to 85°C (50°C with Laser ON) controller: 0°C to 85°C				
Storage temperature		sensor: -40°C to 85°C controller: -40°C to 85°C				
Relative humidity		10 to 95%, non condensing				
Vibration	sensor	IEC 68-2-6: 3 G, 11-200Hz, any axis				
Shock	sensor	IEC 68-2-27: 50 G, 11ms, any axis				
Weight		sensor: 600g; controller: 420g				

<sup>1</sup> Adjustable via controller or software

<sup>2</sup> ε = 1, response time 1s; at ambient temperature: 23 ± 5°C

<sup>3</sup> with dynamic adaption at low signal levels

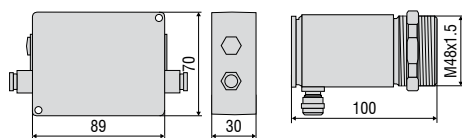

**Product identification**

CTLM -	1	L	SF150-	C3
			Cable length [3m (standard) / 8m / 15m]	
			Focus [SF / CF2 / CF3 / CF4 / FF]	
			Temperature range [L / H / H1]	
			Spectral range [1µm / 1.6µm]	
thermoMETER CTLaserM				

**Accessories page 20 - 21**


- Mounting bracket
- Air purge collar
- Rail mount adapter for controller
- Water cooled housing
- Interface kit
- Certificate of calibration




**LASER LIGHT**  
DO NOT STARE INTO BEAM  
CLASS 2 LASER  
IEC 60825-1:2007  
1mW / 630-650nm

CTLaser / CTLaserFAST / CTLaserGLASS / CTLaserM1/M2/M3/M5 / CTLaserCOMBUSTION

Controller

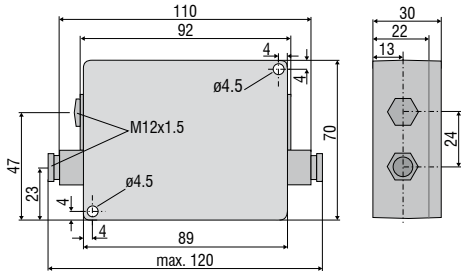


Sensor




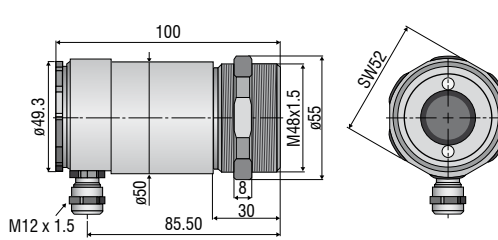


CTratioM1

Controller




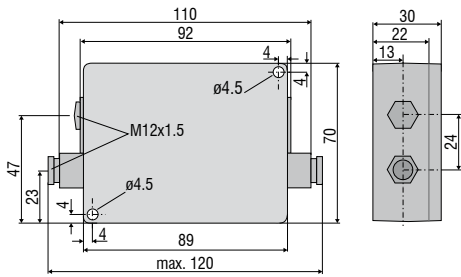


Sensor

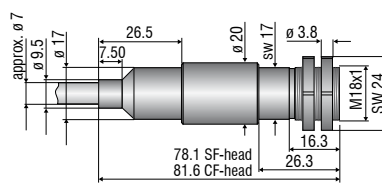

TM-FB-CTL Mounting bracket (fixed);  
included in CTL scope of supply

TM-AB-CTL Mounting bracket (adjustable)

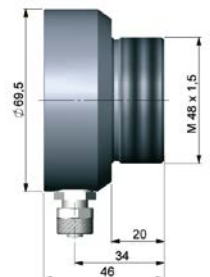

TM-W-CTL Water cooled housing and  
air purge collar TM-AP-CTL,  
mounted on adjustable mounting bracket TM-AB-CTL

TM-W-CTL Water cooled housing

TM-AP-CTL Air purge collar



Mechanical accessories		
Art. No.	Model	
2970238	TM-AB-CTL	Mounting bracket, adjustable, stainless steel
2970239	TM-AP-CTL	Air purge collar, stainless steel
2970240	TM-W-CTL	Water cooled housing, stainless steel, for ambient temperatures up to 175°C
2970241	TM-RAIL-CTL	Rail mount adapter for CTLaser controller
2970242	TM-COV-CTL	Closed cover for controller
2970243	TM-MN-CTL	Mounting nut, stainless steel (spare)
2970244	TM-FB-CTL	Mounting bracket, fixed, stainless steel (spare)
2970298	TM-A20UN-CTL	Screw adapter M48x1 on 20UN-2A screw including mounting nut

High temperature accessories for CTLaser		
2970366	TM-J-CTL	Cooling jacket (length 228mm, ø89mm) (conversion kit TM-CONK-CTL is required)
2970374	TM-CONK-CTL	Conversion kit for CTL on axial cable exit, for integration in cooling jacket
2970368	TM-JAB-CTL	Adjustable mounting bracket for cooling jacket
2970369	TM-MF-CTL	Mounting flange M48x1.5 for TM-PF-CTL
2970370	TM-AST300-CTL	Reflection protection tube M48x1.5, 300mm length
2970371	TM-PA-CTL	Pipe adapter M48x1.5
2970372	TM-RM-CTL	Furnace wall mount accessory for CTL (TM-MF-CTL, TM-AST300-CTL and TM-PA-CTL)
2970412	TM-PF-CTL	Pipe flange M48x1.5 for directly mounting a CTL sensor
2970487	TM-CJA-CTL	Cooling Jacket Advanced - universal cooling jacket for CSLaser, CTLaser and CTVideo / CSVideo up to 315°C


Calibration		
2970253	TM-CERT-CTL	Certificate of calibration
2970324	TM-HTCERT-CTL	Certificate of calibration for CTLaser M1-/M2-/M3-/M5-/G-sensors

Interfaces		
2970245	TM-USBK-CTL	USB interface, computer cable, software CompactConnect second cable gland for controller
2970246	TM-RS232K-CTL	RS232 interface, computer cable, software CompactConnect second cable gland for controller
2970338	TM-RS485USBK-CTL	RS485-USB-adapter, incl. PC cable, Software CompactConnect and CTmulti, second cable gland for use with interface board TM-RS485B-CTL
2970248	TM-RS485B-CTL	RS485 interface board incl. second cable gland
2970249	TM-CANK-CTL	CAN-Bus interface; protocol: CANopen Presettings: module address20 (14H), 250kBaud, 0-60°C
2970250	TM-PFBDPK-CTL	Profibus-DPV1 interface for CT selectable with DIN M12 or SUB-D connection
2970251	TM-ETHNK-CTL	Ethernet-Kit: interface board, external Ethernet adapter, software CompactConnect, second cable gland
2970252	TM-RI-CTL	Relay interface: two electrically isolated relays, 60VDC/ 42VAC <sub>eff</sub> 0.4A

Sensor cables and high temperature cables for CTLaser		
2970374	TM-CONK-CTL	Connector-Kit for cables with connector
4800254.003	TM-CB3C-CTL	Sensor cable with connector (3m)
4800254.003H	TM-CB3HC-CTL	High-temperature sensor cable with adapter (3m)
4800254.008	TM-CB8C-CTL	Sensor cable with adapter (8m)
4800254.008H	TM-CB8HC-CTL	High-temperature sensor cable with adapter (8m)
4800254.015	TM-CB15C-CTL	Sensor cable with adapter (15m)
4800254.015H	TM-CB15HC-CTL	High-temperature sensor cable with adapter (15m)




TM-J-CTL cooling jacket (length 228mm, ø 89mm) with adjustable mounting bracket TM-JAB-CTL; suitable for ambient temperatures up to 180°C

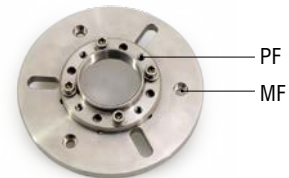

TM-PF-CTL and TM-MF-CTL mounting flange M48x1,5 for directly mounting a CTL sensor



TM-RM-CTL Furnace wall mount accessory for CTLaser / CTratio: TM-MF-CTL, TM-PF-CTL, TM-AST300-CTL and TM-PA-CTL

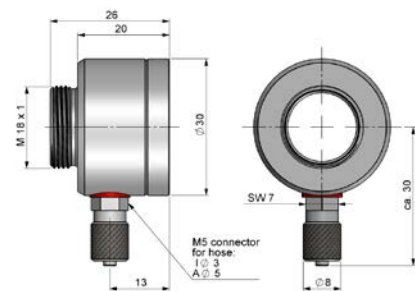

TM-AP-CTR Air purge collar

CTratio		
Art. No.	Model	
2970348	TM-FB-CTR	Mounting bracket, stainless steel, adjustable in one axis
2970395	TM-AP-CTR	Air purge collar, stainless steel
2970373	TM-RM-CTR	Furnace wall mount, stainless steel
2970351	TM-CERT-CTR	Certificate of calibration

## Further IR temperature measurement devices from Micro-Epsilon



**thermoIMAGER TIM**  
Compact USB thermal imaging cameras  
for precise thermography



**thermoMETER CTVideo/CSVVideo**  
IR temperature sensors with  
crosshair laser sighting and video output



**thermoMETER Handheld**  
Innovative handheld pyrometer with laser  
sighting for inspection and maintenance



MICRO-EPSILON Headquarters  
Koenigbacher Str. 15 · 94496 Ortenburg / Germany  
Tel. +49 (0) 8542 / 168-0 · Fax +49 (0) 8542 / 168-90  
info@micro-epsilon.com · [www.micro-epsilon.com](http://www.micro-epsilon.com)

MICRO-EPSILON UK Ltd.  
No.1 Shorelines Building · Shore Road · Birkenhead · CH41 1AU  
Phone +44 (0) 151 355 6070 · Fax +44 (0) 151 355 6075  
info@micro-epsilon.co.uk · [www.micro-epsilon.co.uk](http://www.micro-epsilon.co.uk)