









More Precision.

scanCONTROL

2D/3D laser scanner (laser profile sensors)

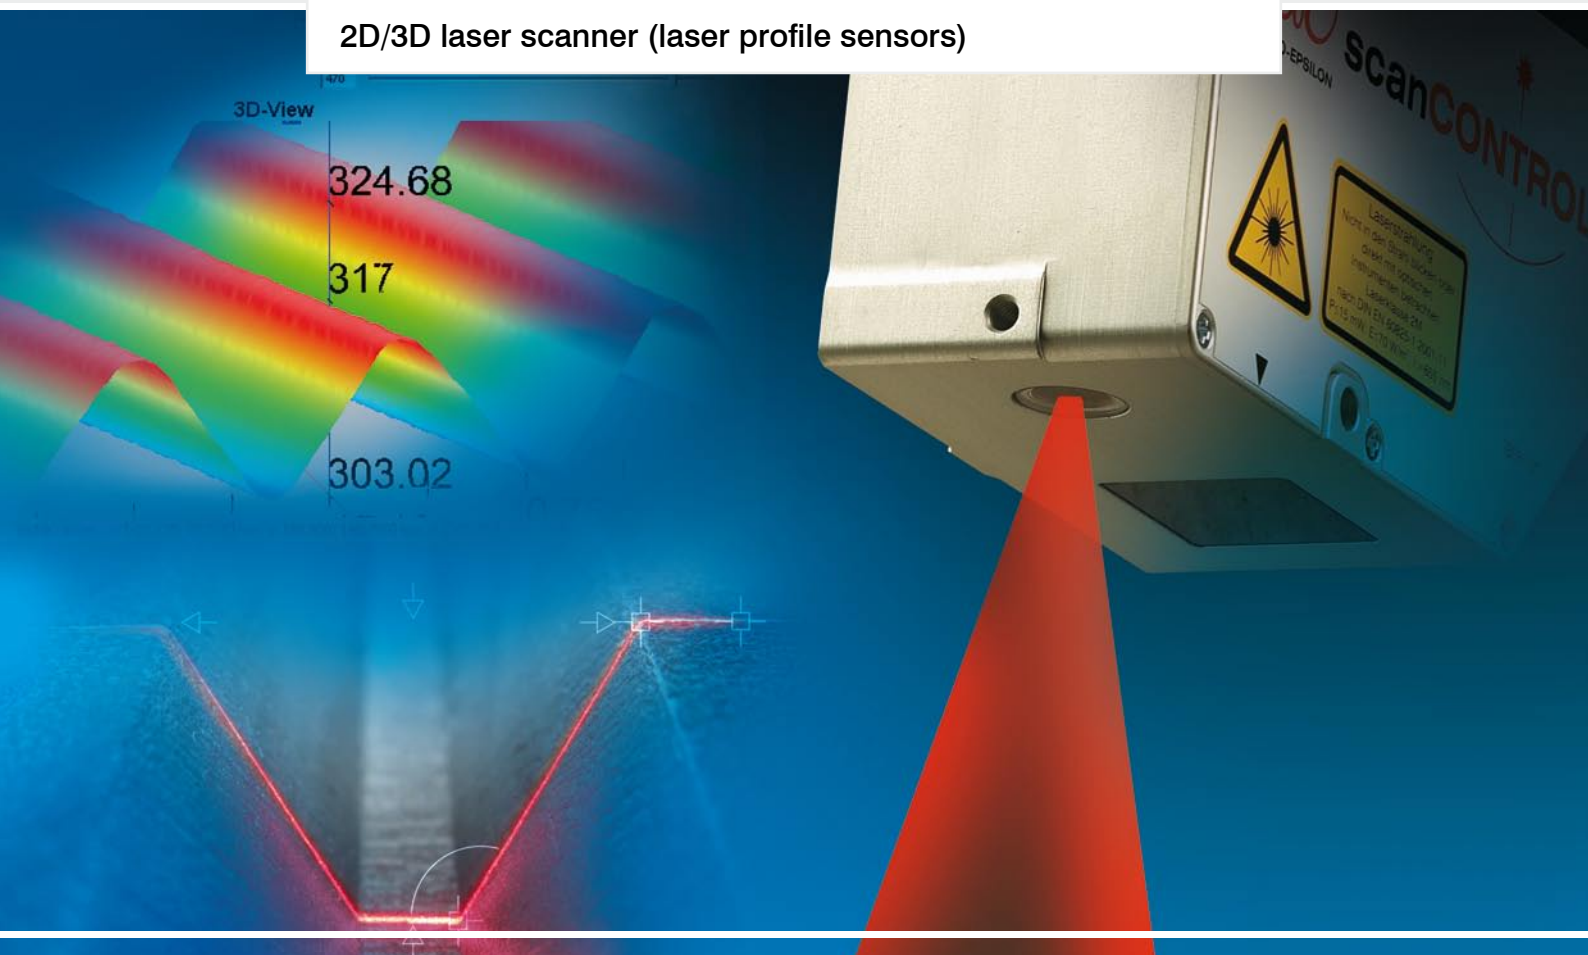

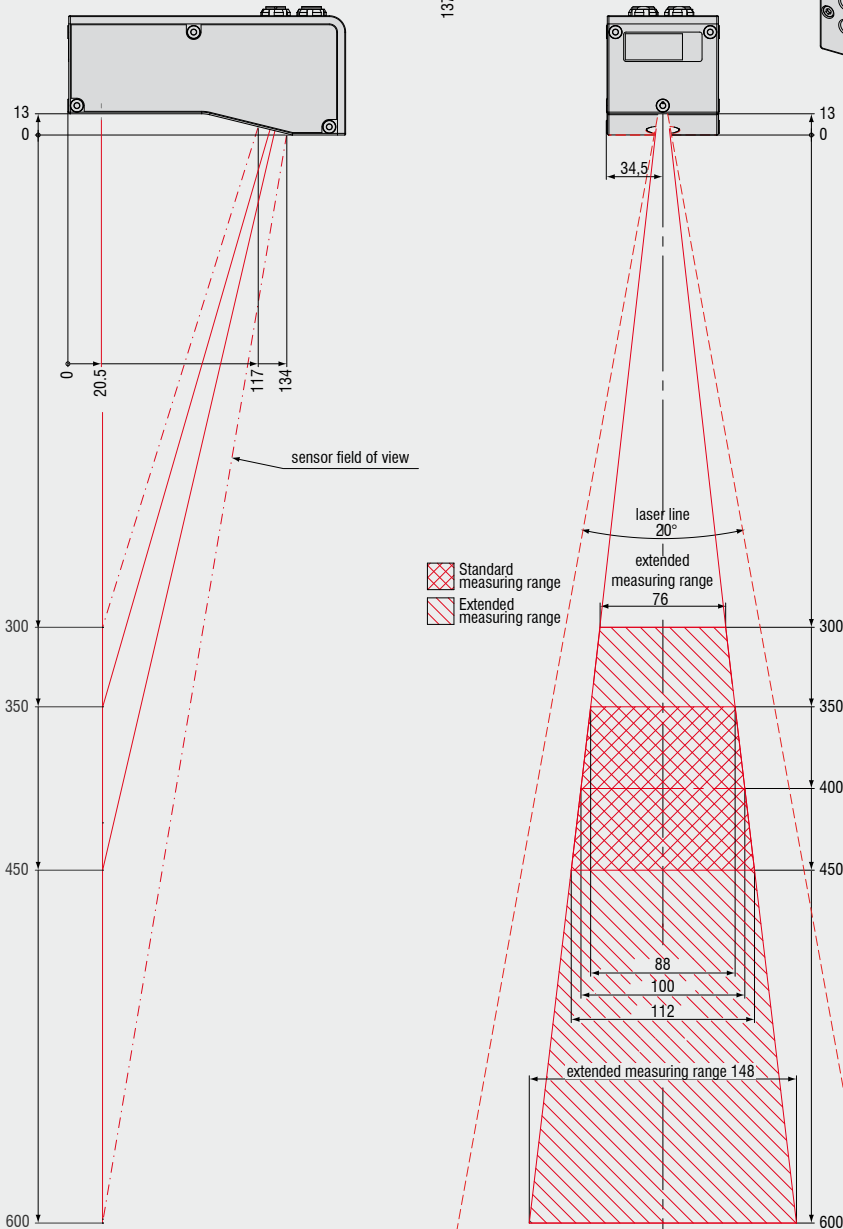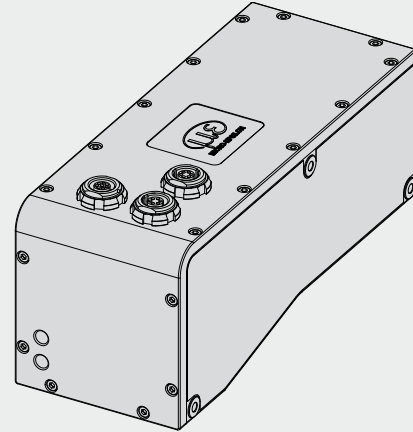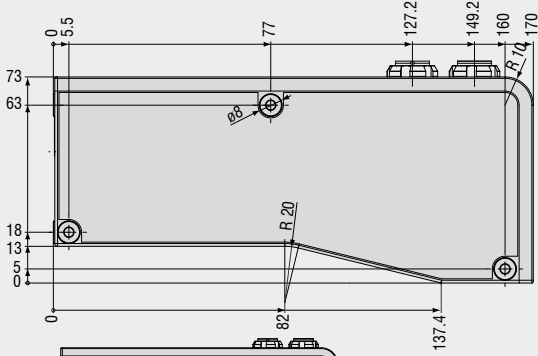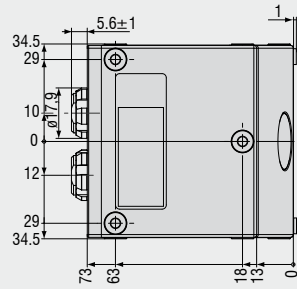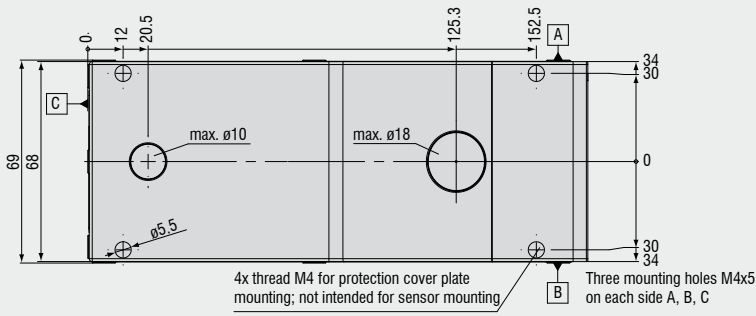

Model		scanCONTROL	COMPACT 2700-100	HIGHSPEED 2750-100	SMART 2710-100
z-axis (height)	Standard measuring range 100mm	Start of measuring range		350mm	
		Midrange		400mm	
		End of measuring range		450mm	
	Extended measuring range 300mm	Start of measuring range		300mm	
		End of measuring range		600mm	
	Linearity ¹⁾	±0.2% FSO (3sigma)		±200µm	
	Resolution	0.04% FSO		40µm	
Reference resolution ²⁾³⁾			15µm		
x-axis (width)	Standard measuring range	Start of measuring range		88mm	
		Midrange		100mm	
		End of measuring range		112mm	
	Extended measuring range	Start of measuring range		76mm	
		End of measuring range		148mm	
	Point distance	Midrange		160µm	
Resolution x-axis		640 points/profile			
Profile frequency		100Hz	2,000Hz	100Hz	
Measurement rate		64,000 points/sec	1,28 mio points/sec	-	
Interfaces profile data	FireWire	■	■	■	
	Ethernet	■	■	■	
	RS422 ⁴⁾	■	■	■	
	Trigger ⁴⁾	■	■	■	
	Counter (encoder) ⁴⁾	■	■		
Signal output SMART	RS422 ⁴⁾			■	
	Analogue ⁵⁾			■	
	Switching signal ⁵⁾			■	
Display (LED)		1x laser, 1x power/error/status			
Protection class		IP 64			
Operating temperature		0°C up to 50°C			
Storage temperature		-20°C up to 70°C			
Cable length		up to 20m			
	Ethernet with Switch FireWire with HUB	up to 50m			
Weight		appr. 850g			
Galvanic isolation		Only at RS422, no isolation of 24V-supply, internal circuit and FireWire bus. If isolation necessary, external 24V-DC-DC-converter required			
Vibration		2g / 20 ... 500Hz			
Shock		15g / 6ms			
Supply		8-30 VDC, 500mA			
Light source		semiconductor laser 658nm			
Aperture angle laser line		20°			
Laser power	standard	10mW (class 2M)			
	optional	20mW (class 3B)			
Laser off		via software (standard) / via external contact (optional)			
Permissible ambient light (fluorescent light) ²⁾		10,000lx			

¹⁾ Standard measuring range

²⁾ Measuring object: Micro-Epsilon standard object (metallic, diffusely reflecting material)

³⁾ According to a one-time averaging across the measuring field (640 points)

⁴⁾ Programmable as serial interface or synchronisation input or encoder input

⁵⁾ Only with Output Unit

FSO = Full scale output

High performance sensors made by Micro-Epsilon



Sensors and systems for displacement, position and dimension

- Eddy current sensors
- Optical and laser sensors
- Capacitive sensors
- Inductive sensors
- Draw-wire sensors
- Optical micrometers
- 2D/3D profile sensors
- Image processing



Sensors and measurement devices for non-contact temperature sensors

- Thermal imager
- Online instruments
- Handheld devices



Measuring systems for quality control

- Plastic and film
- Tyre and rubber
- Web material
- Automotive components
- Glass and panes